



Solutions with Aluminum Profiles


Aluminum Profiles


Aluminum profiles are components that can be used very flexibly to quickly set up new production facilities, such as for machine construction, or to redesign such facilities.

Profile technology has thus established itself for applications such as safety guards, machine base frames

or conveyor system elements, because they can be set up quickly, and easily changed at a later time.

This setup flexibility also requires versatile fittings that can be used to quickly and easily open or close access doors and flaps.

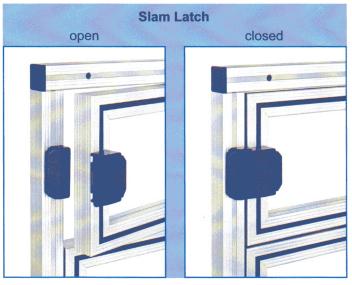

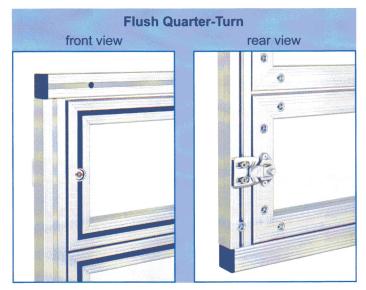



Products for Aluminum Profiles

PRODUCT SYSTEM	FEATURES	APPLICATIONS	DIMENSIONS	INSTALLATION	SURFACE	MATERIAL	DIRAK
6-150	Slam-closing & lockable	Latch for Doors & Machine Covers	38 x 75 mm 80 x 75 mm	Screw-on with tenon blocks	Black Coated or Chrome Plated	Die-cast Zinc	SLAM LATCH
4-247	Lift-off & for profile widths 30/35/40/45/50, RH and LH	Hinge for Doors	31 x 31 mm	Screw-on with tenon blocks	Black Coated or Chrome Plated	Die-cast Zinc	LIFT-OFF HINGES
4-271	Adjustable horizontally and vertically	Hinge for Doors & Flaps	76 x 60 mm	Screw-on with tenon blocks	Black Coated or Chrome Plated	Die-cast Zinc	2D ADJUSTABLE HINGE
4-250	Available with contact spring	Hinge for Doors & Flaps	40 x 40 mm	Screw-on with tenon blocks	Black Coated or Chrome Plated	Die-cast Zinc	180° HINGE
1-046SL	Available with different pull-out strengths	Blind Closing of Doors & Flaps	30 x 10 mm	Screw-on with tenon blocks	Black	Die-cast Zinc	JOINER, 30 X 10
1-112	Flush with doors & profiles, adjustable	Doors and Flaps	Ø 22 x L22-66 mm	Screw-on with anti-rotation plate	Black Coated or Chrome Plated	- Die-cast Zinc	FLUSH QUARTER-TURN
6-1000/1031/1102/ 1104/1106	Lightweight	Doors and Flaps	30 mm - 500 mm	Screw-on with tenon blocks	Black Coated or Natural	Polyamide or Aluminum	BRIDGE HANDLES
1-020	Installable by hand without tools	Fastening sheet metal panels to profiles	16 x 14 mm for 10 mm channels	Snap-in	Black	Polyamide	JOINER
Delivery times and prices on request	Snap-in by hand, Can be additionally secured with screw	Doors and Flaps	60 x 70 mm for 10 mm channels	Snap-in with securing screw	Black	Polyamide	SNAP-IN HINGE